


MI0523-NR01101

Fraise à graver 3/4 avec rayon
Fresa a incidere 3/4 con raggio



P1	P2	P3	P4	P5	M1	M2	M3	K1	N1	N2
N3	N4	N5	N6	N7	N8	S1	S2	S3	H1	

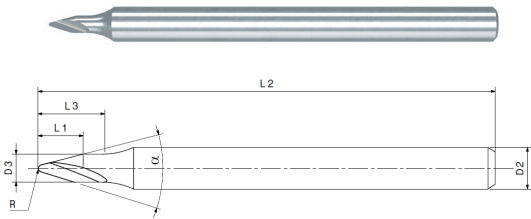

α	R	L1	D2	L2	D3	L3	Z	Non revêtu Non rivestito Art. N°	DWS Art. N°
35°	0.05	1.90	3	39	1.5	3.4	1	460282	460286
35°	0.10	1.90	3	39	1.5	3.4	1	460283	460287
35°	0.15	1.90	3	39	1.5	3.4	1	460284	460288
35°	0.20	1.90	3	39	1.5	3.4	1	460285	460289

MI0523-NR01101

Paramètres de coupe
Parametri di taglio

ISO	n [1/min]	F [mm/min]		ap [mm]
		Ø 0.05 - 0.10	Ø 0.15 - 0.20	
P1	25000 - 40000	50 - 200	80 - 250	0.02 - 0.30
P2	25000 - 40000	50 - 200	80 - 250	0.02 - 0.30
P3	25000 - 40000	50 - 200	80 - 250	0.02 - 0.30
P4	20000 - 35000	50 - 150	70 - 200	0.02 - 0.30
P5	20000 - 35000	50 - 150	70 - 200	0.02 - 0.25
M1	20000 - 35000	50 - 150	70 - 200	0.02 - 0.20
M2	20000 - 35000	50 - 150	70 - 200	0.02 - 0.20
M3	20000 - 35000	50 - 150	70 - 200	0.02 - 0.20
K1	25000 - 40000	50 - 250	80 - 300	0.02 - 0.30
N1	25000 - 40000	50 - 300	100 - 350	0.02 - 0.30
N2	25000 - 40000	50 - 300	100 - 350	0.02 - 0.30
N3	25000 - 40000	50 - 250	100 - 300	0.02 - 0.30
N4	25000 - 40000	50 - 250	100 - 300	0.02 - 0.30
N5	25000 - 40000	50 - 250	100 - 300	0.02 - 0.30
N6	25000 - 40000	50 - 250	100 - 300	0.02 - 0.30
N7	25000 - 40000	50 - 250	100 - 300	0.02 - 0.30
N8	25000 - 40000	50 - 300	100 - 300	0.02 - 0.30
S1	25000 - 40000	50 - 150	70 - 200	0.02 - 0.25
S2	25000 - 40000	50 - 150	70 - 200	0.02 - 0.25
S3	20000 - 35000	50 - 150	70 - 200	0.02 - 0.10
H1	20000 - 35000	50 - 100	70 - 200	0.02 - 0.20
H2				

Valeurs indicatives
Valori indicativi