

THT

Gewindedrehstähle mit Innenkühlung
Threading bars with integrated coolant




P1	P2	P3	P4	P5	M1	M2	M3		N1	N2
N3	N4	N5	N6	N7	N8	S1	S2	S3		

Schruppen
Roughing



Schlichten
Finishing

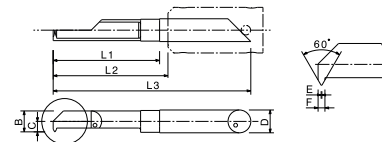

Lagerartikel / In-stock items

D	Ø min.	L1	L2		Steigung Pitch P	E	F	B	C	L3	Unbeschichtet Uncoated Art. N°
			HTH	MTH							
THT											
4.00	1.20	3.50	11.00	17.20	0.20-0.35	0.02	0.30	1.10	0.80	39.00	450423
4.00	1.60	4.00	11.00	17.20	0.25-0.40	0.03	0.35	1.40	0.80	39.00	450424
4.00	2.50	6.00	11.00	17.20	0.35-0.50	0.04	0.44	2.25	1.35	39.00	450425
4.00	3.20	8.00	16.00	22.20	0.50-0.70	0.05	0.62	2.85	1.50	44.00	450427
4.00	4.00	8.00	16.00	22.20	0.50-0.70	0.05	0.62	3.70	2.10	44.00	450429
6.00	4.20	15.00	21.00	27.20	0.50-0.80	0.06	0.70	3.90	2.40	49.00	450432
6.00	5.00	18.00	21.00	27.20	0.75-1.00	0.09	0.89	4.50	2.20	49.00	450434

DIAMETAL Group · www.diametal.com